


8=5/16 X 1 3/4" BOLTS-A 2=1/2" WING BOLTS-E
 2=5/16 X 2" BOLTS-B 4=3/4 PLUGS-F
 24=5/16 USS WASHERS-C 2=1" PLUGS-G
 14=5/16 LOCK NUTS-D 2=5/16 X 1/2 U-BOLTS-H



248

FRONT RACK KAWASAKI

MOUNT THE BRACKETS TO THE BIKE TIGHTEN THEM UP. TERYX4 750 2012 MODELS
 THEN MOUNT ALL BRACKETS AND HARDWARE TO THE RACK
 LEAVE LOOSE AND BOLT THE RACK TO THE MAIN BRACKETS
 ON THE BIKE. THEN ONCE THE RACK IS CENTERED ON THE
 MACHINE TIGHTEN THE RACK BRACKETS TO THE RACK.


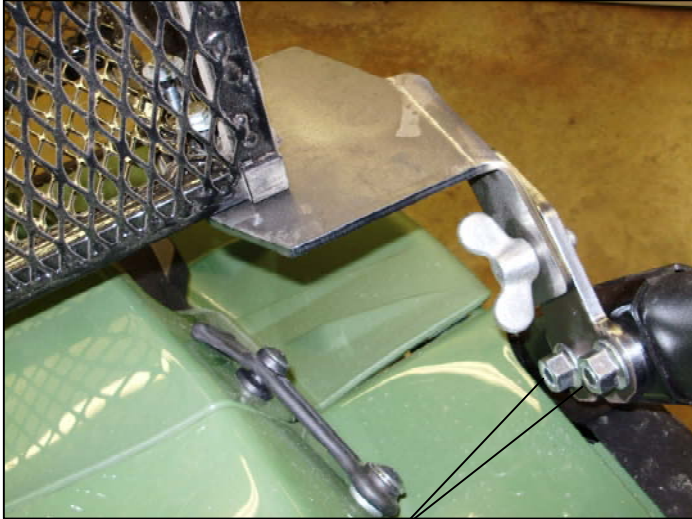


MOUNT THE TOP MOUNT BRACKETS TO THE ROLL CAGE. REMOVE TWO LARGE NUTS PLACE BRACKET ON INSIDE OF CAGE AND REPLACE TWO LARGE NUTS.




MOUNT BOTTOM MOUNT BRACKET TO FRONT BUMPER OF MACHINE. MAY LOOK DIFF. BUT WILL MOUNT THE SAME ONTO THE FRONT BUMPER.


MOUNT RACK BRACKET TO THE BOTTOM MOUNT BRACKET ON THE BUMPER.

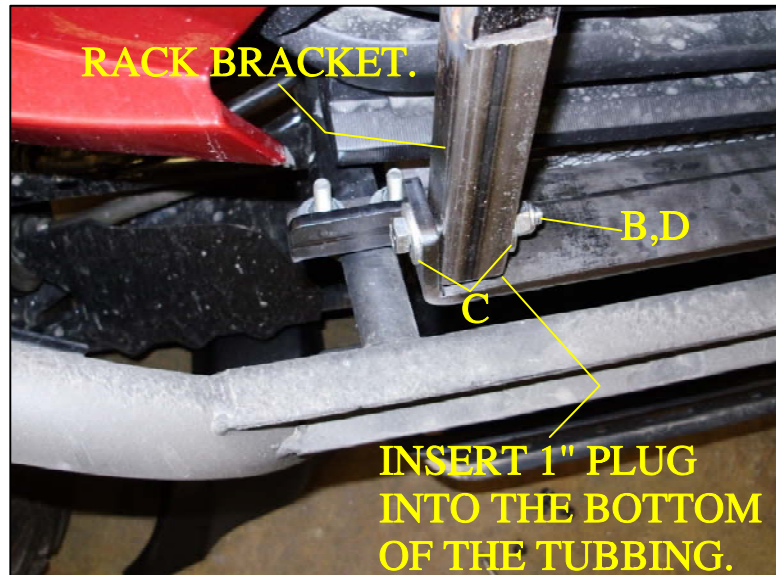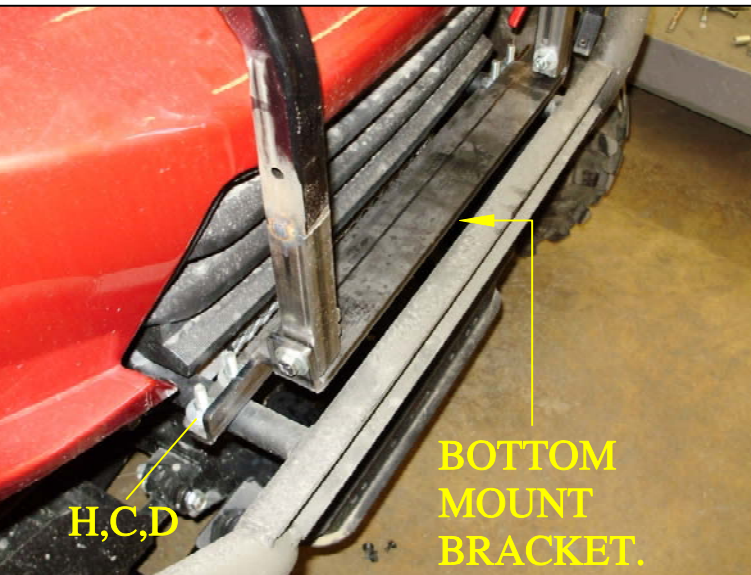

MOUNT THE RACK BRACKET THE FRONT OF THE RACK.

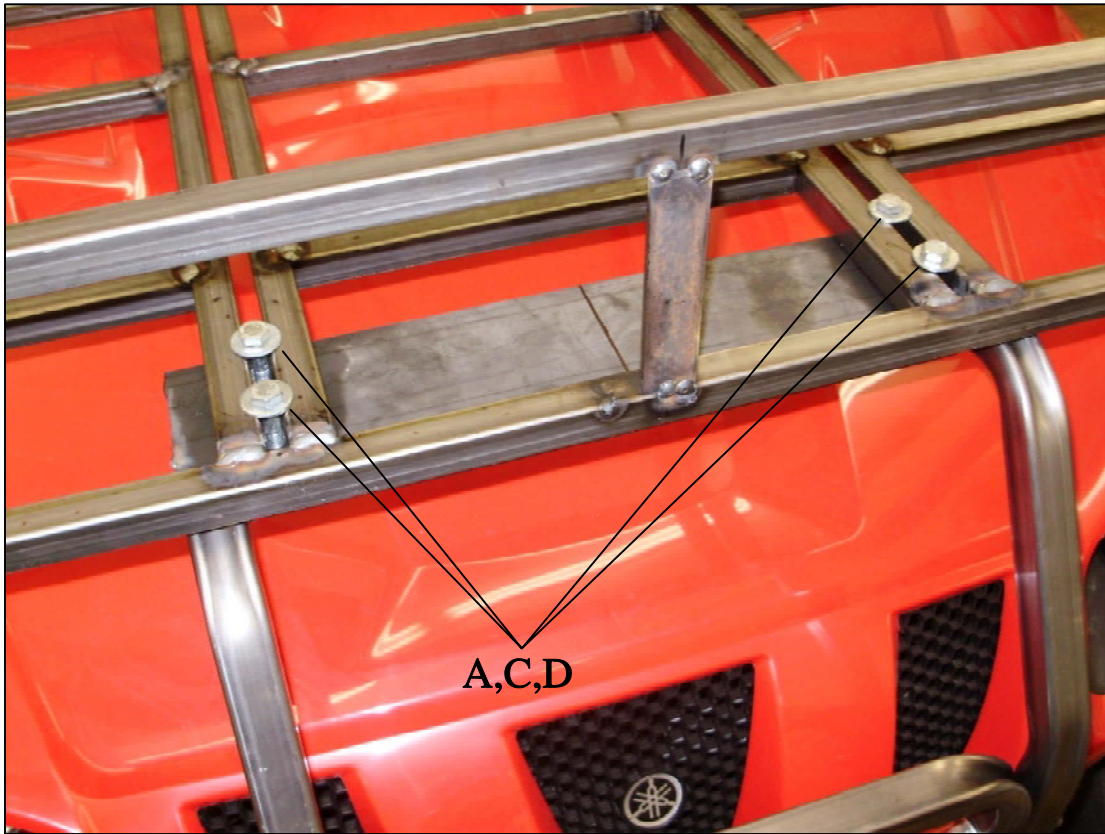

MOUNT THE REAR RACK BRACKETS TO THE REAR OF THE RACK.

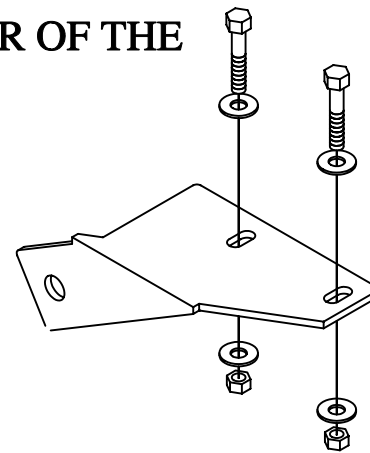

MOUNT THE RACK TO THE FRONT AND REAR BRACKETS.

