

- 2=5/16 X 1 1/4 U-BOLTS-A
- 4=5/16 LOCK NUTS-B
- 4=5/16 USS WASHERS-C
- 4=5/16 ROD CAPS
- 4=1/4 X 1 SQUARE
- YELLOW U-BOLTS-D
- 8=1/4 LOCK NUTS-E
- 8=1/4 SAE WASHERS-F
- 2=FGAR-2
- 4=RUBBER SNUBBERS





REAR GUN RACK MOUNT POLARIS RANGER
4X4 2X4 4X6
GR124

REAR POLARIS GUN RACK
RANGER 2X4 4X4 4X6

PLACE THE ROD CAPS ON ALL EXISTING THREADS THAT ARE LEFT ONCE THE BRACKET HAS BEEN MOUNTED...

THE BRACKET WILL MOUNT BEHIND THE DRIVER AND PASSENGERS HEAD IN THE CENTER.

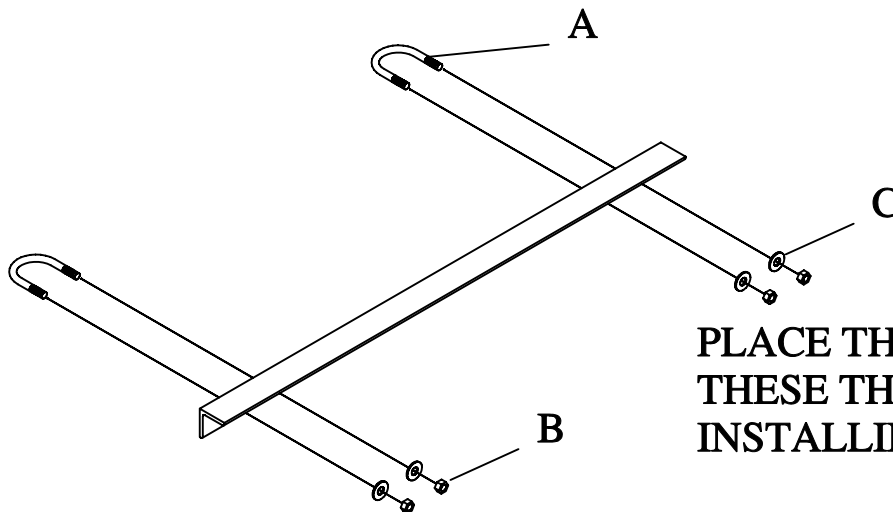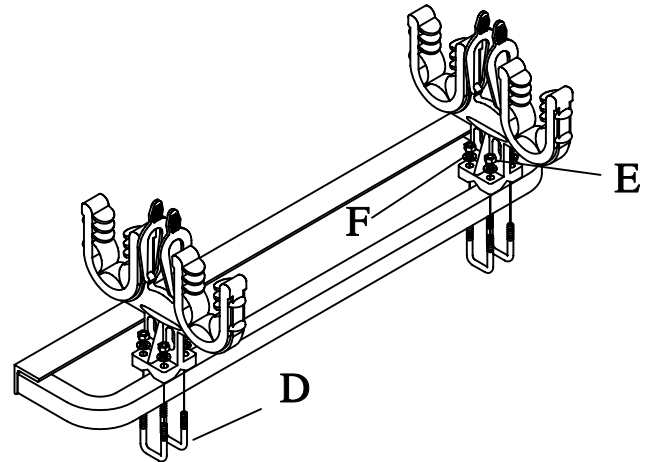

PLACE THE 5/16 ROD CAPS ON THESE THREADS AFTER INSTALLING..