

- 12=1/4 LOCK NUTS-A
- 4=1/4 SAE WASHERS-B
- 6=1/4X1 SQUARE YELLOW U-BOLTS-C
- 2=5/16X1 1/4 BOLTS-D
- 8=5/16 SAE WASHERS-E
- 2=5/16 LOCK NUTS-F
- 4=1/4 ROD CAPS-G
- 2=1" PLUGS-H
- 1= ALUMIN. WASHERS SLOTS-I
- 1=GR BRACKET L SHAPE-J

- 1= 1" TUB. 19 LONG-K
- 2=FGAR-2-L
- 1=MAIN BRACKET-M

- 4=RUBBER SNUBBERS-N
- 2=5/16 X 1/2 U-BOLTS-O
- 4=5/16 SAE WASHERS-P
- 4=5/16 LOCK NUTS-Q
- 4=5/16 ROD CAPS-R


PACK IN BOX,



GR128

HONDA FOREMAN 500 4X4

MOUNT THE BRACKET AS SHOWN
HERE TO THE HANDLE BARS.

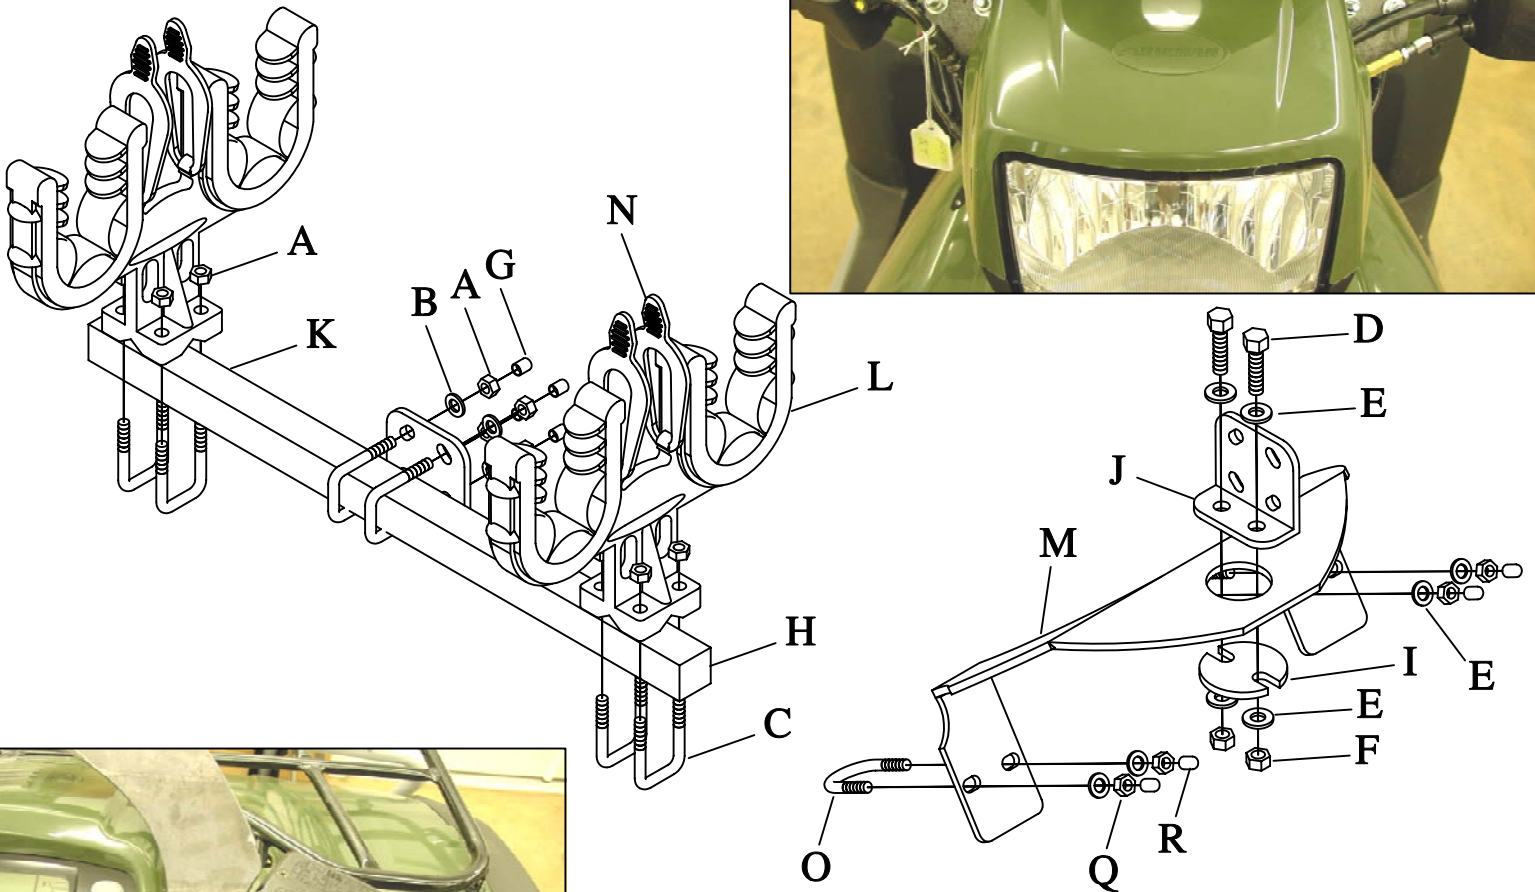

IN ORDER TO MOUNT THE BRACKET TO THE
BARS YOU MAY HAVE TO LOOSEN THE
THROTTLE BODY AND BRAKE FLUID
RESERVOIR AND SLIDE THEM TOWARD THE
HANDLE GRIP.