


- 2= 1/4 X 3/4 U-BOLTS-A
- 6=6MM X 25MM X 1 BOLTS-B
- 4=1/4 LOCK NUTS-C
- 10=1/4 SAE WASHERS-D
- 8= #16 TANNER RIVETS-E
- 8=5/16 SAE WHASERS-F
- 6= 1/4 GALV. SPACERS 3/8 LONG-G




# # SS152H

## SUZUKI KING QUAD 700 4X4 REAR STICK STOPPERS

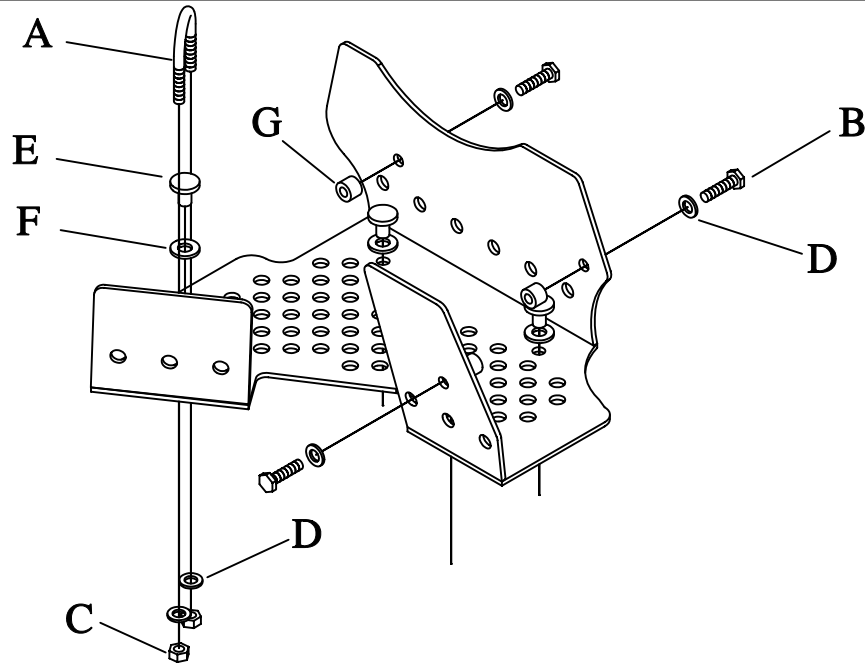

**THIS END WILL FACE THE INSIDE OF THE RIM ONCE IT HAS BEEN MOUNTED.**

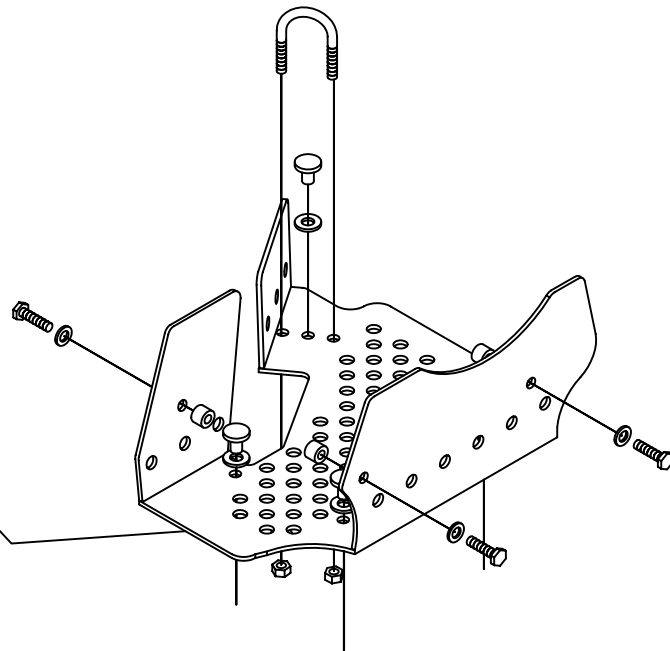

**THE PROCESS WILL BE EASIER IF THE REAR WHEELS ARE REMOVED. TO DO THIS JUST PLACE A JACK UNDER THE HITCH AND LIFT OFF GROUND THEN REMOVE THE TWO WHEELS. REMOVE THE PLASTIC GUARDS AND INSTALL THE SS152H AS SHOWN HERE.**