


6=6MM X 1 X 25MM BOLTS
6=1/4 GALV SPACERS 3/8" LONG.



SS183H-AL

REAR GUARDS FOR KAWASAKI TERYX 750 4X4

REMOVE PLASTIC GUARDS FOR
INSTALLING THE NEW METAL
GUARDS. MUST REUSE THE
WASHERS ON THE ORIGINAL
STOCK BOLTS.

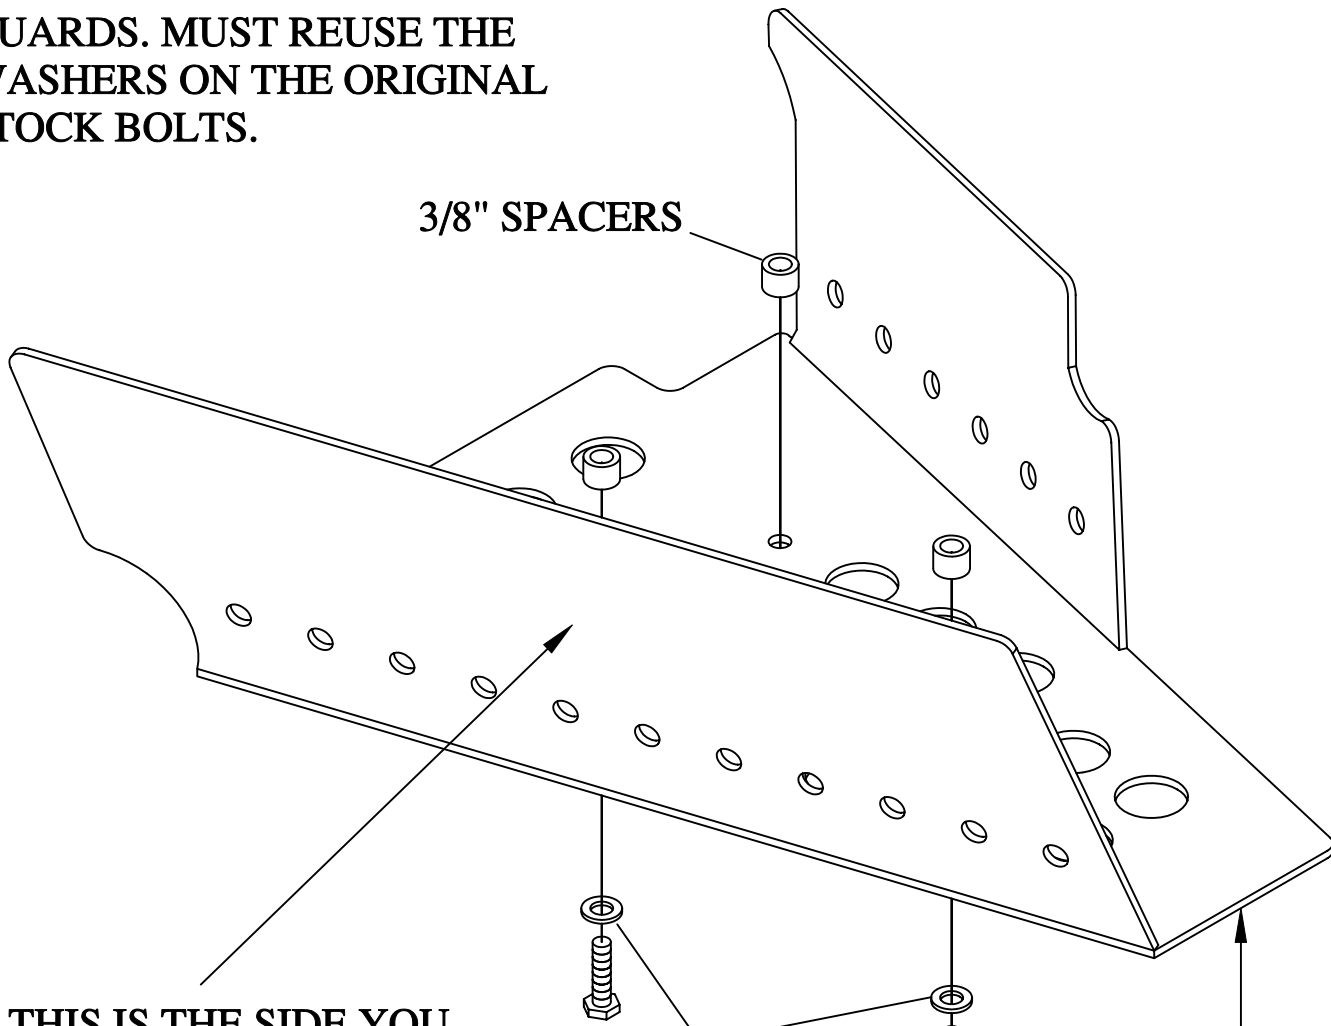

THIS IS THE SIDE YOU
WILL SEE WHEN
LOOKING AT THE
REAR OF THE
MACHINE.

ORIGINAL WASHERS THAT
COME WITH THE STOCK
BOLTS.

6MMX1X25MM BOLTS

THIS END WILL FACE
THE INSIDE OF THE
RIM ONCE THE
GUARD HAS BEEN
MOUNTED UNDER
THE A-ARM.

EVEN THOUGH THE NEW BOOT GUARDS YOU HAVE
PURCHASED WILL COVER MORE THAN THE
ORIGINAL PLASTIC GUARDS. BOOTS HAVE BEEN
REPORTED TO BE TORN IN SOME CONDITIONS .DUE
TO THE TURING RADIUS ON SOME OF THE NEWER
ATV'S. THE BOOT PROTECTORS HAVE BEEN
MANUFACTURED SMALLER TO ALLOW FOR A
TIGHTER TURING RADIUS. SAVANT MFG. (STRONG
MADE) DOES NOT WARRANTY AND TORN BOOTS.