


- 2= 1/4 X 3/4 U-BOLTS-A
- 4=6MM X 25MM X 1 BOLTS-B
- 4=1/4 LOCK NUTS-C
- 8=1/4 USS WASHERS-D
- 8= #16 TANNER RIVITS-E
- 8=5/16 SAE WHASERS-F
- 4= 1/4 GALV. SPACERS 3/8 LONG-G




**# SS206H**  
**SUZUKI KING QUAD 500**  
**2010 REAR GUARDS**

THESE ARE THE LOCATIONS WHERE THE HARDWARE WILL BE USED ONCE MOUNTED UNDER THE CONTROL ARM.

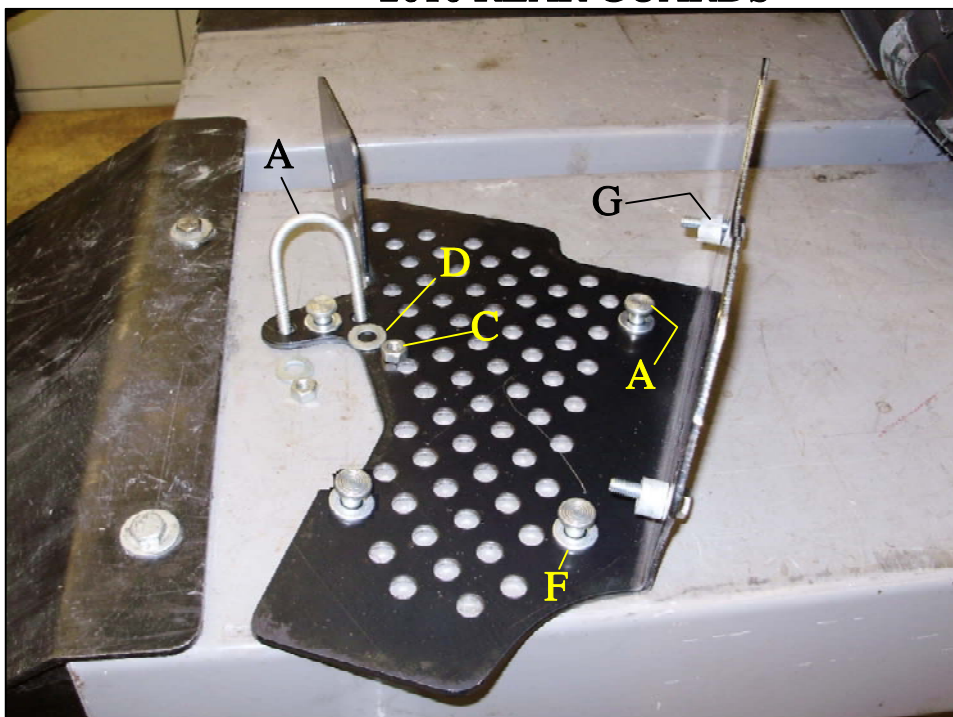

THIS IS A PIC OF THE LEFT REAR ON ATV ONCE MOUNTED.

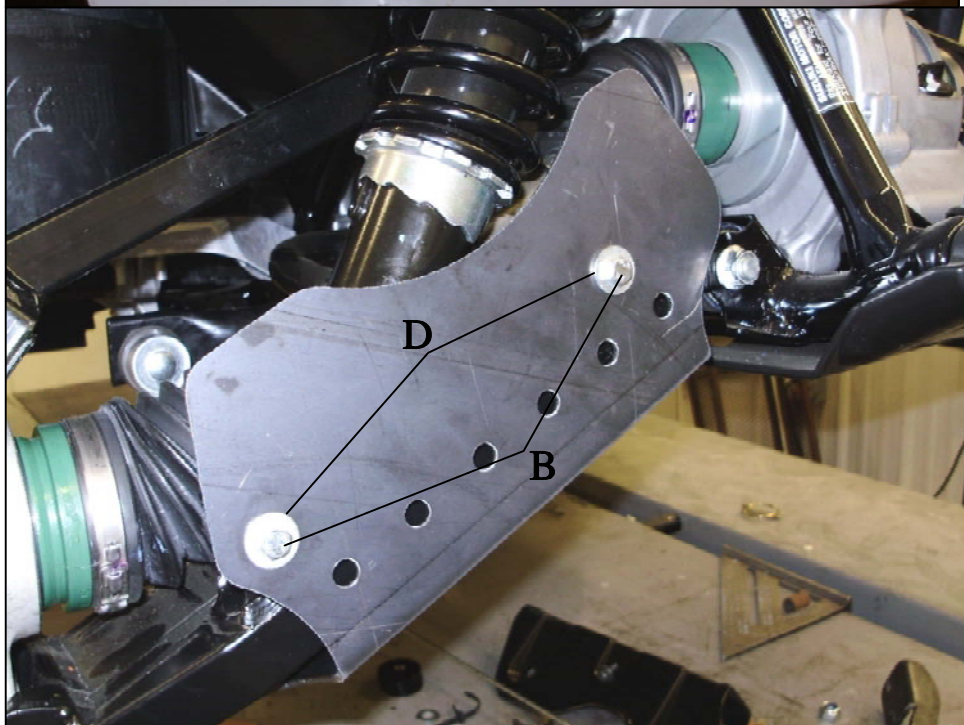

THE PROCESS WILL BE EASIER IF THE REAR WHEELS ARE REMOVED. TO DO THIS JUST PLACE A JACK UNDER THE HITCH AND LIFT OFF GROUND THEN REMOVE THE TWO WHEELS. REMOVE THE PLASTIC GUARDS AND INSTALL THE SS152H AS SHOWN HERE.