


6=1/4 GALV. SPACERS 3/8 LONG -A
6=6MM X 1 X 25MM BOLTS-B
6=1/4 WASHERS-C
6=6MM LOCK NUTS-ON THE
NEWER MODELS YOU WILL HAVE
TO USE THESE LOCK NUTS ON THE
6MM BOLTS. KAWASAKI QUIT
WELDING THE NUTS ON THE
ARMS.



SS216H

FRONT GUARDS KAWASAKI TERYX4 800

REMOVE PLASTIC GUARDS FOR
INSTALLING THE NEW METAL
GUARDS.

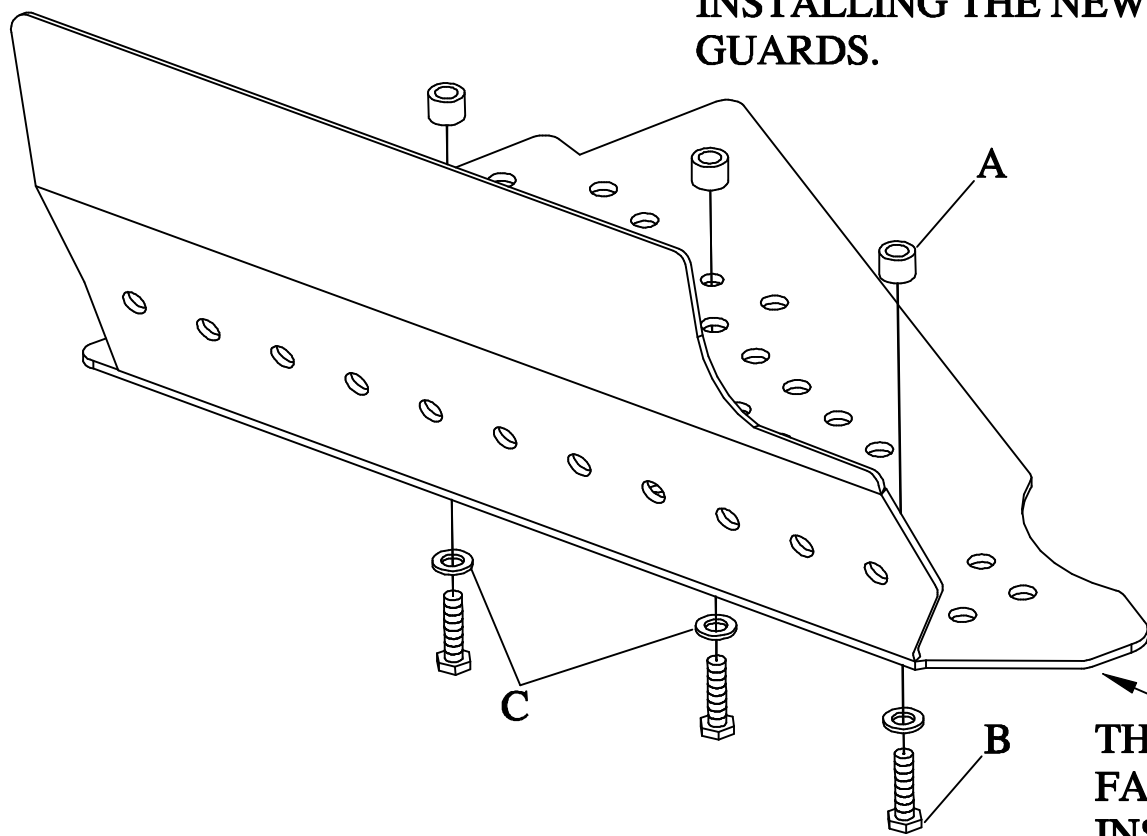

THIS END WILL
FACE THE
INSIDE OF THE
RIM ONCE IT
HAS BEEN
MOUNTED
UNDER THE
A-ARM.

EVEN THOUGH THE NEW BOOT GUARDS YOU HAVE
PURCHASED WILL COVER MORE THAN THE
ORIGINAL PLASTIC GUARDS. BOOTS HAVE BEEN
REPORTED TO BE TORN IN SOME CONDITIONS .DUE
TO THE TURING RADIUS ON SOME OF THE NEWER
ATV'S. THE BOOT PROTECTORS HAVE BEEN
MANUFACTURED SMALLER TO ALLOW FOR A
TIGHTER TURING RADIUS. SAVANT MFG. (STRONG
MADE) DOES NOT WARRANTY AND TORN BOOTS.